NOVO 38





The Novo can also be installed directly on the floor.

8	
HEAT CAPACITY	•••••
1,000 to 2,500 sq.ft.	
111	
MAX. HEAT OUTPUT	
105 000 DTU	

125,000 BTUs

 \bigotimes HEATING TIME Up to 12 hours

LOG SIZE Maximum: 23" Recommended: 18"

FIREBOX SIZE 3.8 cu ft

EMISSIONS

1.85 g/hr EPA 2020 Certified

6




CHIMNEY

6 inch listed to UL103/ ULC S629 standards

EXCLUSIVE FEATURES



This patented, user-friendly mechanism automatically reduces the amount of combustion air introduced during ignition to the desired burn rate setting. The result is a beautifully consistent fire burning to its full capacity.




Crafted with care, our heavy-duty cast iron panels are stamped with a brick pattern on one side and a flowing contemporary design on the other. These reversible panels provide a versatile design that is as beautiful as it's functional.



This powerful yet whisper-quiet system effortlessly distributes heat over significant distances. As the combustion progresses, the high-quality blower automatically activates and is set using the variable speed controller.



Soapstone is a natural material marked by its elegant appearance, unfaltering durability and exemplary thermal properties. By absorbing, storing and radiating heat over time, it provides consistent and long-lasting warmth.




The Novo's firebox can be customized by choosing between two materials: soapstone and cast iron. Both are incredibly durable and heat-efficient, yet offer distinct aesthetic appeal.



Our products have a unique design that allows secondary air to enter through a perforated baffle offering an unimpeded viewing area to the fire all while increasing the stove's efficiency and prolonging the combustion.

WEIGHT & DIMENSIONS

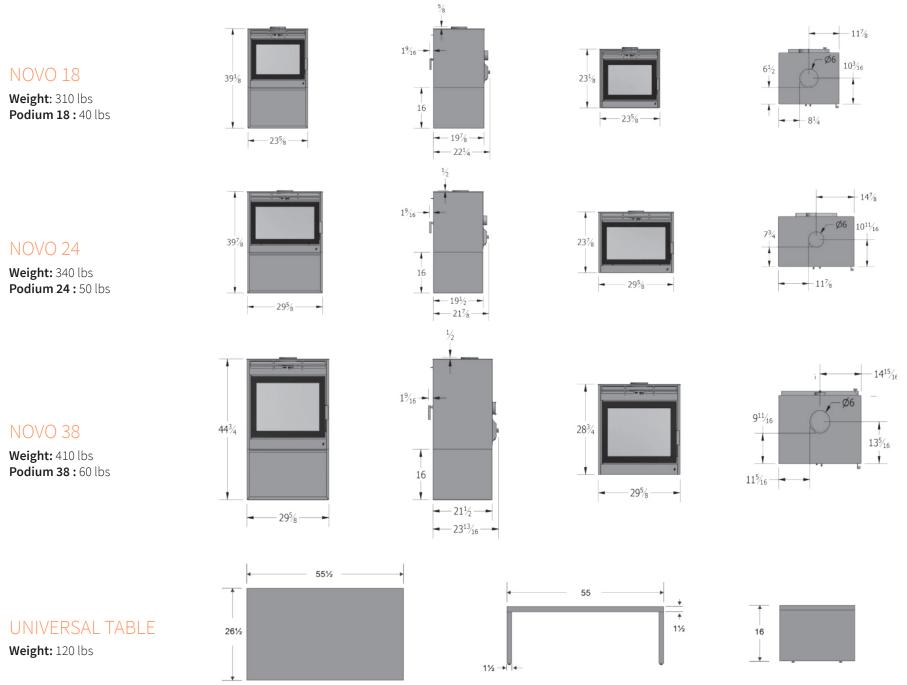

I M E N S I O N